


SINGLE CEILING BASE

INSTALLATION INSTRUCTIONS | FEBRUARY 2025

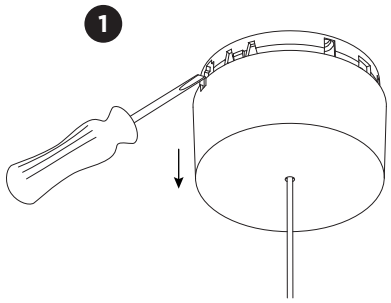


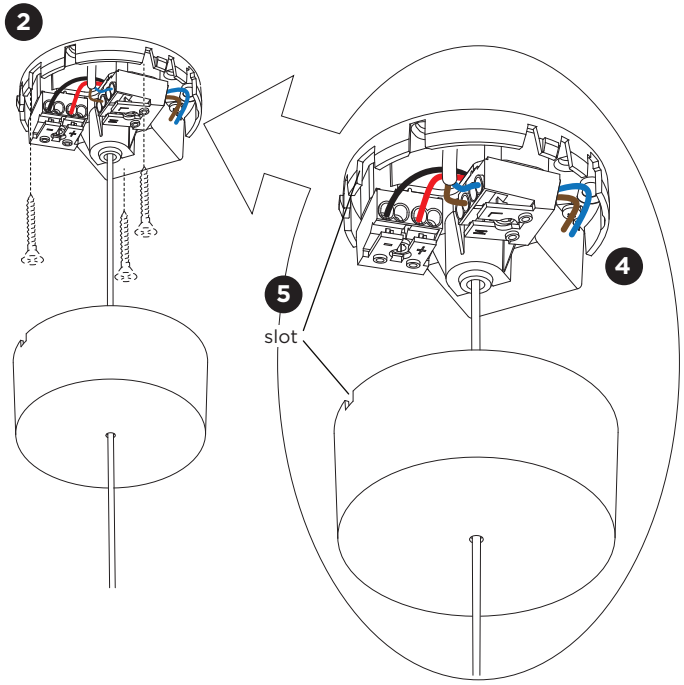


3 How to reduce the length of the cable.

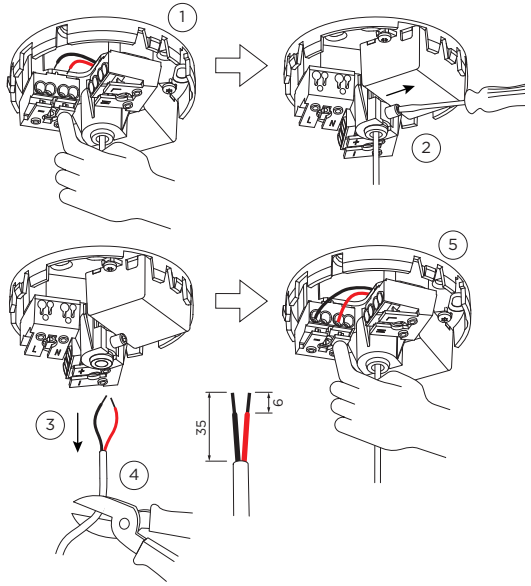

Mounting base:

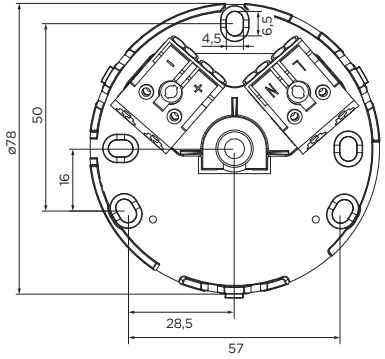

DIMENSIONS




MOUNTING INSTRUCTION

1 Remove the cover from the mounting base by placing a flat tool into the gap and pushing down.

2 Mount the base on the ceiling with screws (screws are not included).

3 Optional: shorten the cable to your required lenght.
See the diagrams for details.
The driver must be powered off before disconnecting and connecting the cables.

4 **POWER CONNECTION**
Connect to 220-240V.



5 Align the slots on both of the mounting base and the cover.
Push the cover on the mounting base until it clicks.


PB19-010-981-00_v0


WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

SINGLE CEILING BASE

INSTALLATION INSTRUCTIONS | FEBRUARY 2025

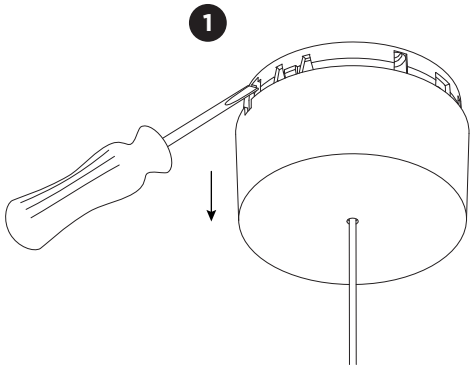

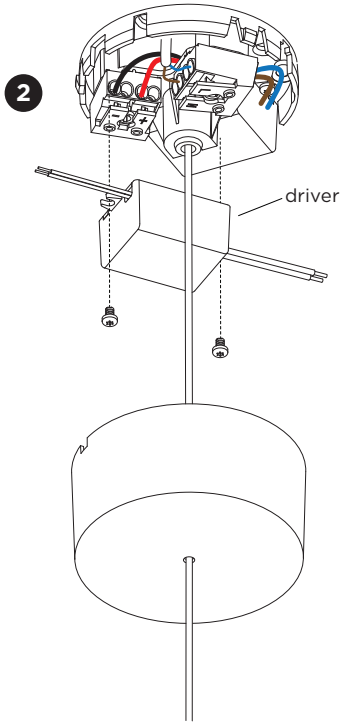

DISMOUNTING AND RECYCLING INSTRUCTIONS
Driver

1. Remove the cover from the mounting base by placing a flat tool into the gap and pushing down.
2. Loosen the screws and disconnect the wires to remove the driver.

The driver can be replaced by the end user.

WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com