

suq.3

93800
00 14/25

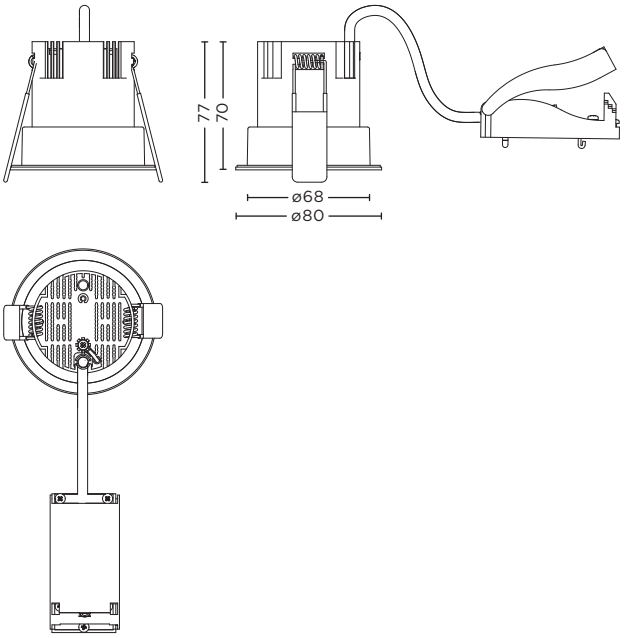

Größe in mm
size in mm

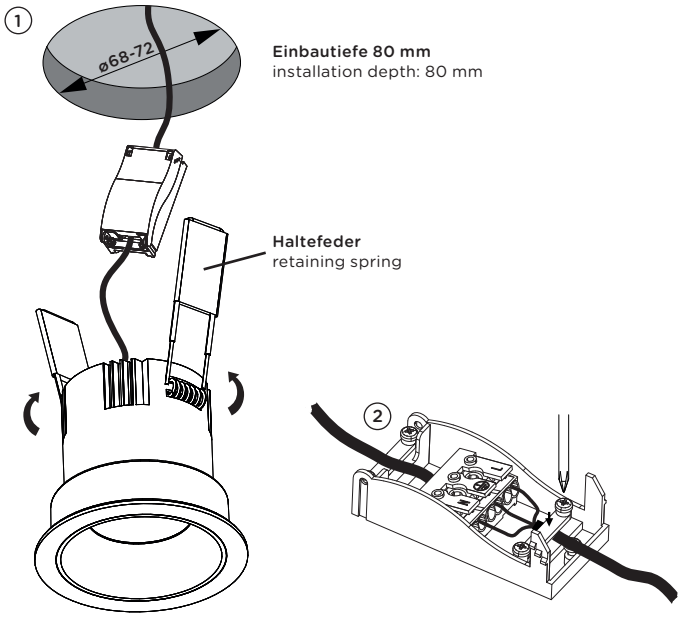

IP65

DE . Gebrauchsanweisung

Anwendung: Deckeneinbauleuchte für den Außenbereich

Material: Aluminiumguss pulverbeschichtet
+ Polycarbonat matt

Technische Daten
230V Power LED
Lichtfarbe: 2700 Kelvin
Systemleistung: 8 Watt/340 Lumen
CRI 90
Betriebsspannung: 230V / 50Hz

Installation: 1x Kabeleinführung; Anschlussklemme 3x 1,5 mm²
Dieses Produkt enthält eine Lichtquelle der Energie-effizienzklasse **G**
Gewicht: 0,21 kg

Sicherheit: Wir weisen darauf hin, dass der Anschluss von Leuchten durch einen fachkundigen Installateur zu erfolgen hat. Für Installation und Betrieb der Leuchten sind die nationalen Sicherheitsvorschriften zu berücksichtigen. Für Schäden, die durch nicht sachgemäße Montage oder Einsatz der Leuchte entstehen, wird keine Haftung übernommen. Bei nachträglichen Änderungen am Produkt erlischt die Gewährleistung.

Dimmung: Die Leuchte kann mit einem von IP44.DE freigegebenen Phasenabschnittdimmer betrieben werden. Die Liste mit den freigegebenen Dimmern können Sie bei IP44.DE anfragen.

EN . instructions for use

application: recessed ceiling luminaire for outside use

material: aluminium die-casting powder-coated
+ polycarbonate matt

technical information
230V Power LED
colour temperature: 2700 Kelvin
system performance: 8 watt/340 lumen
CRI 90
operating voltage: 230V / 50Hz

installation: 1x cable entry point; connection terminal 3x 1,5 mm²
This product contains a light source of energy efficiency class **G**
weight: 0,21 kg

safety: We point out that the electric connection of light fixtures has to be done by a certified installer. The national safety regulations must be observed for the installation and operation of the luminaires. We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the product will result in loss of warranty.

dimming: The luminaire can be dimmed with a trailing edge dimmer approved by IP44.DE. You can request the list of approved dimmers from IP44.DE.


Montageanleitung

1. Deckenausschnitt im Durchmesser 68-72 mm vorbereiten (Bild 1). Erforderliche Einbautiefe von 80 mm berücksichtigen.
2. Installationsbox öffnen, Schutzleiterverbindung herstellen und elektrischen Anschluss vornehmen. Für Zugentlastung der Netzleitung sorgen (Bild 2).
3. Leuchte mit Haltefedern in der Decke befestigen (Bild 1).

Hinweis: Stellen Sie sicher, dass über die Decke keine Feuchtigkeit in die Leuchte eindringen kann!

Pflege: Leuchte regelmäßig von Schmutz und Ablagerungen säubern. Es dürfen keine Hochdruckreiniger zu Reinigungsarbeiten verwendet werden. Beachten Sie auch die Pflegehinweise unter www.IP44.de.

Wartung LED-Lampen: Dieses Produkt enthält eingebaute LED-Lampen. Diese können im Falle eines Ausfalls durch IP44.DE ausgetauscht werden. Kontaktieren Sie hierzu Ihren Fachhändler.



Entsorgung: Produkt nur an zugelassenen Sammel- und Rücknahmestellen entsorgen. Nicht im Hausmüll entsorgen!

Bewahren Sie diese Gebrauchsanweisung gut auf.

IP44.DE behält sich spätere technische Änderungen vor.


installation instructions

1. Prepare a ceiling cut-out with a diameter of 68-72 mm (picture 1). Consider the required installation depth of 80 mm.
2. Open the installation box, establish protective conductor connection and make electrical connection. Provide strain relief for mains cable (picture 2).
3. Fix the luminaire with retaining springs in the ceiling (picture 1).

note: Make sure that moisture can‘t ingress into the luminaire through the ceiling!

caring: Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning. Please note care instructions at www.IP44.de.

maintenance LED-lamps: This product contains built-in LED lamps. These can be replaced by IP44.DE in case of a failure. In this case, please get in touch with your retailer.



disposal: Product may only be disposed of at approved collection and return points. Do not dispose of in household waste.

Keep these instructions for use in a safe place.

IP44.DE reserves the right to make subsequent technical changes.

IP44 Schmalhorst GmbH & Co. KG
Mühlenstraße 20 . 33378 Rheda-Wiedenbrück . Germany . T +49 5242 5797-0 . welcome@IP44.de . www.IP44.de