Flo Wall M

Foster+Partners, 2013

LUMINA

CRI >90 | CCT 2700K 3000K | A++ G | 2-step switch | III | CE | UK CA

Wall lamp in varnish coated aluminium and steel for diffused directional light. The head rotates 300° to direct the 3W-LED light and the arm swivells 180° on the wall bracket. 2-step push switch positioned on the head. Transformer not included.



FINISHINGS

Black Soft Touch
3000K - cod. 97601ST00
2700K - cod. 97601STK27

Brushed Nickel
3000K - cod. 97644000
2700K - cod. 97644K270

Matt White
3000K - cod. 97602OP00
2700K - cod. 97602OPK27


Metallic Bronze
3000K - cod. 97629MT00
2700K - cod. 97629MTK27

Matt Red
3000K - cod. 97603OP00
2700K - cod. 97603OPK27

Gun Metal
3000K - cod. 97632000
2700K - cod. 97632K270


Matt Yellow
3000K - cod. 97605OP00
2700K - cod. 97605OPK27

ALL RAL COATING AND GALVANIC FINISHES AVAILABLE UPON REQUEST

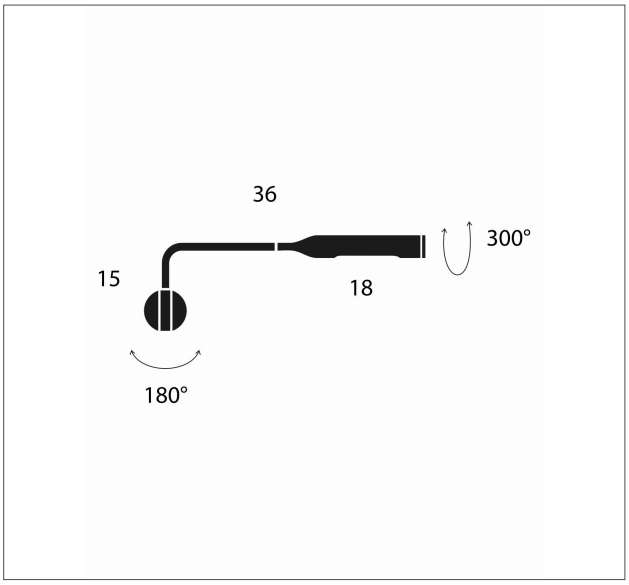

LIGHT EMISSION

Light source power: 3,22W
Power absorption: 3,22W
Light Emission: Diffuse
Light Direction: Directional
Light Source: Discrete LED
Source Flux 3000K: 260lm@350mA
Emitted Flux 3000K: 207lm
Efficacy 3000K: 64lm/W
Source Flux 2700K: 250lm@350mA
Emitted Flux 2700K: 201lm
Efficacy 2700K: 62lm/W
CCT: 2700/3000K
CRI: 90
Lifetime: >55000h

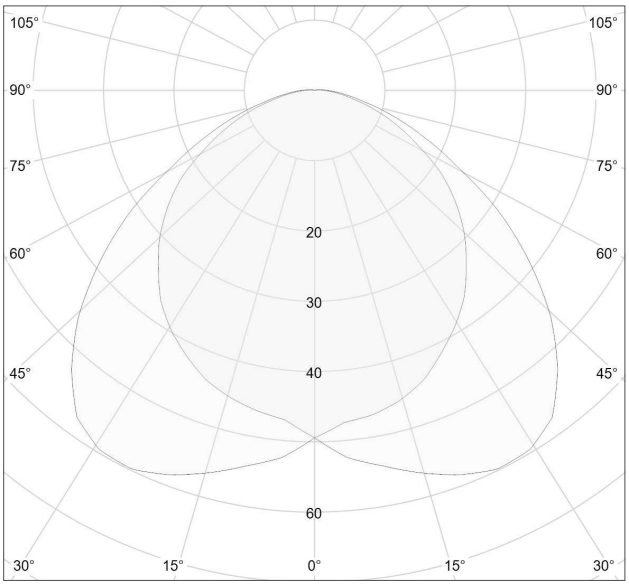

ELECTRICAL FACTS

Stand-by absorption: N/A
Mains Voltage: ----
Master output: ----
Ta max: 40°C

PACKAGING DATA

Box dimensions: 50x31x8 cm
Volume: 0,012 m^3
Gross weight: 1,1 kg