moooi

Push Light

PAUL COCKSEDGE



Push Light by Paul Cocksedge transforms a simple gesture into a suspension lamp. A sculptural curved shade passes through a sleek ring, shaping a soft, reflective glow. Dimmable and designed to spark wonder, it creates atmosphere through lightness, balance and an elegant sense of motion.

Colours

230V - Casambi


230V - DALI

230V - ELV

110V - ELV/0-10V

Push Light / 50

Dimensions

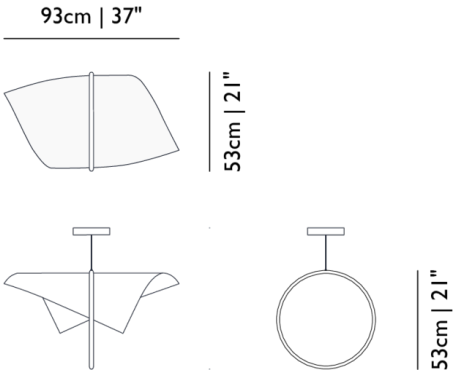

Product

WIDTH 93cm | 36.6"
HEIGHT 53cm | 20.9"
DEPTH 53cm | 20.9"
WEIGHT NETTO 1kg | 2.2lbs

Packaging

WIDTH 77cm | 30.3"
HEIGHT 72cm | 28.3"
CUBAGE 0.04m^3 | 1.37ft^3
LENGTH 7cm | 2.8"
WEIGHT 4.9kg | 10.8lbs

Casambi

MATERIAL
Aluminium ring with hidden electronics, thin PVC sheet

INSTALLATION REQUIRED
Yes

LIGHTSOURCE INCLUDED
Yes

INPUT VOLTAGE
220-240V

MAX POWER CONSUMPTION
8.5W

CABLE COLOUR
Transparent with tinned cores

CANOPY
Disc White, Nylon

CRI
93

LIGHT OUTPUT
639 lm

CONSTANT CURRENT / CONSTANT VOLTAGE
Constant current

EFFICIENCY
75.18 lm/W

LIGHTSOURCE TYPE
LED

NUMBER OF LIGHTSOURCES
1

FREQUENCY
50/60

LIFETIME
50000 hours

CABLE LENGTH
300cm | 118.1"

COLOUR TEMPERATURE
2695 K (max)

LIGHT DIRECTION
All directions

R9
60

EEI
0.16

MEASURED POWER CONSUMPTION
8.5W

OUTPUT CURRENT
200 mL

OUTPUT VOLTAGE
36

DIMMING & LIGHTING CONTROL
Casambi, DALI dt6, ELV - Trailing edge

See last page for more information about the dimming possibilities.

DALI

MATERIAL
Aluminium ring with hidden electronics, thin PVC sheet

INSTALLATION REQUIRED
Yes

LIGHTSOURCE TYPE
LED

LIGHTSOURCE INCLUDED
Yes

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
220-240V

FREQUENCY
50/60

MAX POWER CONSUMPTION
8.5W

LIFETIME
50000 hours

CABLE COLOUR
Transparent with tinned cores

CABLE LENGTH
300cm | 118.1"

CANOPY
Disc White, Nylon

COLOUR TEMPERATURE
2695 K (max)

CRI
93

LIGHT DIRECTION
All directions

LIGHT OUTPUT
639 lm

R9
60

CONSTANT CURRENT / CONSTANT VOLTAGE
Constant current

EEI
0.16

EFFICIENCY
75.18 lm/W

MEASURED POWER CONSUMPTION
8.5W

OUTPUT CURRENT
200 mL

OUTPUT VOLTAGE
36

DIMMING & LIGHTING CONTROL
Casambi, DALI dt6, ELV - Trailing edge

See last page for more information about the dimming possibilities.

ELV

MATERIAL
Aluminium ring with hidden electronics, thin PVC sheet

INSTALLATION REQUIRED
Yes

LIGHTSOURCE TYPE
LED

LIGHTSOURCE INCLUDED
Yes

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
220-240V

FREQUENCY
50/60

MAX POWER CONSUMPTION
8.5W

LIFETIME
50000 hours

CABLE COLOUR
Transparent with tinned cores

CABLE LENGTH
300cm | 118.1"

CANOPY
Disc White, Nylon

COLOUR TEMPERATURE
2695 K (max)

CRI
93

LIGHT DIRECTION
All directions

LIGHT OUTPUT
639 lm

R9
60

CONSTANT CURRENT / CONSTANT VOLTAGE
Constant current

EEI
0.16

EFFICIENCY
75.18 lm/W

MEASURED POWER CONSUMPTION
8.5W

OUTPUT CURRENT
200 mL

OUTPUT VOLTAGE
36

DIMMING & LIGHTING CONTROL
Casambi, DALI dt6, ELV - Trailing edge

See last page for more information about the dimming possibilities.

ELV/0-10V

MATERIAL
Aluminium ring with hidden electronics, thin PVC sheet

INSTALLATION REQUIRED
Yes

LIGHTSOURCE TYPE
LED

LIGHTSOURCE INCLUDED
Yes

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
120-277V

FREQUENCY
60

MAX POWER CONSUMPTION
8.5W

LIFETIME
50000 hours

CABLE COLOUR
Transparent with tinned cores

CABLE LENGTH
300cm | 118.1"

CANOPY
Disc White, Nylon

CRI
93

LIGHT OUTPUT
639 lm

CONSTANT CURRENT / CONSTANT VOLTAGE
Constant current

EFFICIENCY
75.18 lm/W

OUTPUT CURRENT
200 mL

DIMMING & LIGHTING CONTROL
0-10V

COLOUR TEMPERATURE
2695 K (max)

LIGHT DIRECTION
All directions

R9
60

EEI
0.16

MEASURED POWER CONSUMPTION
8.5W

OUTPUT VOLTAGE
36

See last page for more information about the dimming possibilities.

Dimming & Lighting Control

Casambi

Casambi can be used to connect your luminaire(s) with your existing Casambi smart home network. Casambi networks are Bluetooth based networks where all products, including the Casambi app on your phone or tablet, will be connected to each other. Other lamps, products or switches can be added to the Casambi network via different converters allowing you full wireless control. There is no need to change your home's wiring.

Compatible models:

DALI dt6

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models:

ELV - Trailing edge

Control the mood with ease. This light fixture can be dimmed using an external Electronic Low Voltage dimmer. Simply connect it to an existing outlet—no need to rewire your home. Choose a dimmer designed for LED lights, suitable for 5 watts or lower, and supporting a C-type (capacitive load). This ensures compatibility and smooth operation. As with all delicate lighting, the experience of dimming may occasionally bring a flicker, hum, or soft buzz.

Compatible models:

0-10V

The luminaire is dimmable by using an either internally mounted or externally placed 0-10V dimmer switch. 0-10V is a dimming system widely used in some parts of the world, for example in North-America. This method will need its own wiring. Dimming quality is perfect, without flicker, the range can be limited and the luminaire can be dimmed to off. Please note that this is only possible using a 0-10V compatible driver. Contact us for more information.

Compatible models:
