SHEDDA

INSTALLATION INS TRUCTIONS | JUNE 2025

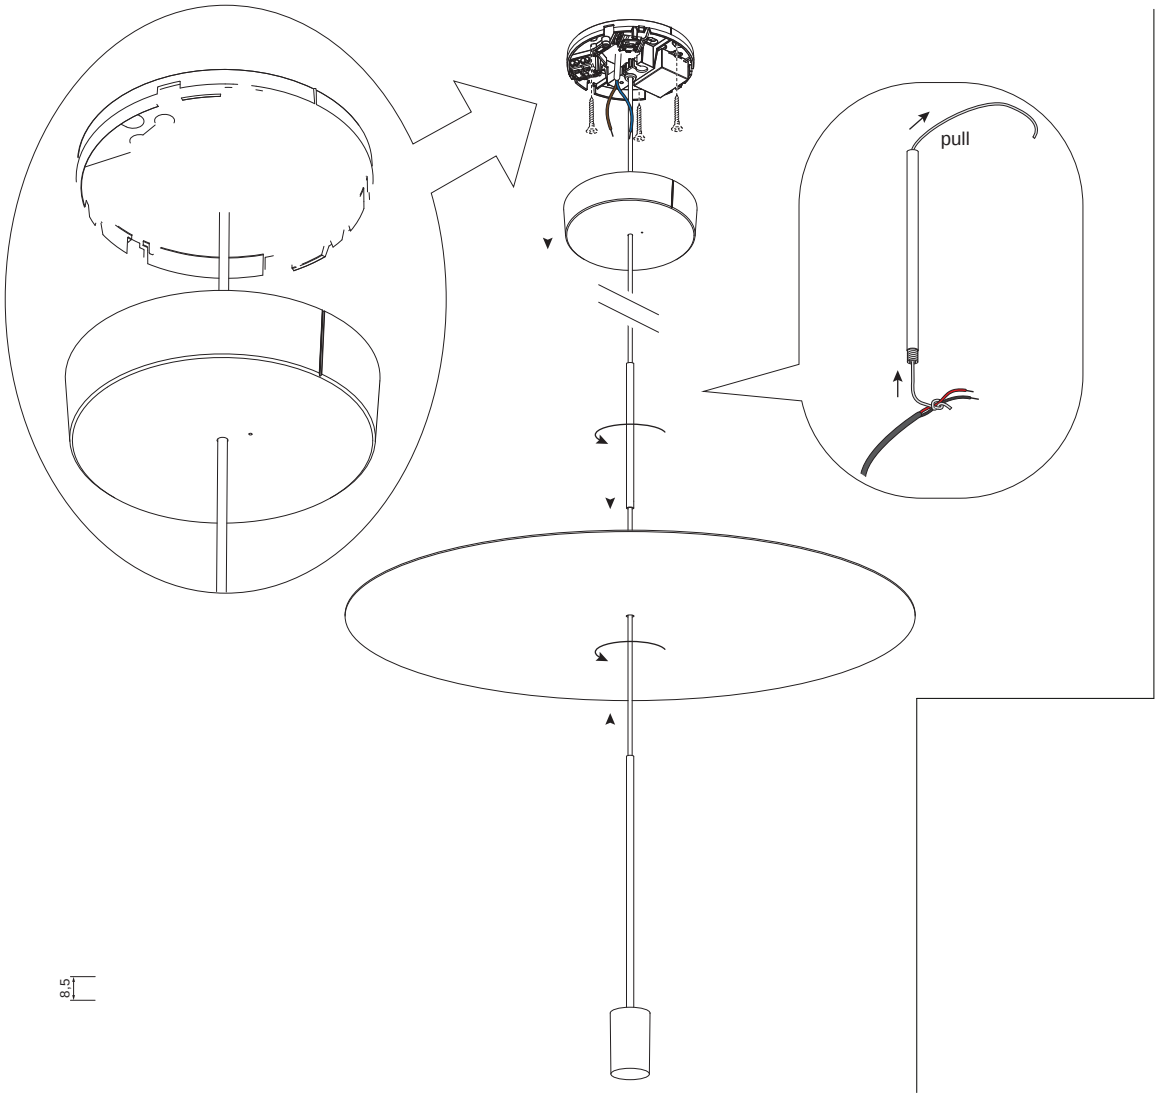

PB19-010-982-00_v1

WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijs traat 99 / 21,8500 K ortrijk, Belgium
weverducr e.com

SHEDDA

INSTALLATION INS TRUCTIONS | JUNE 2025

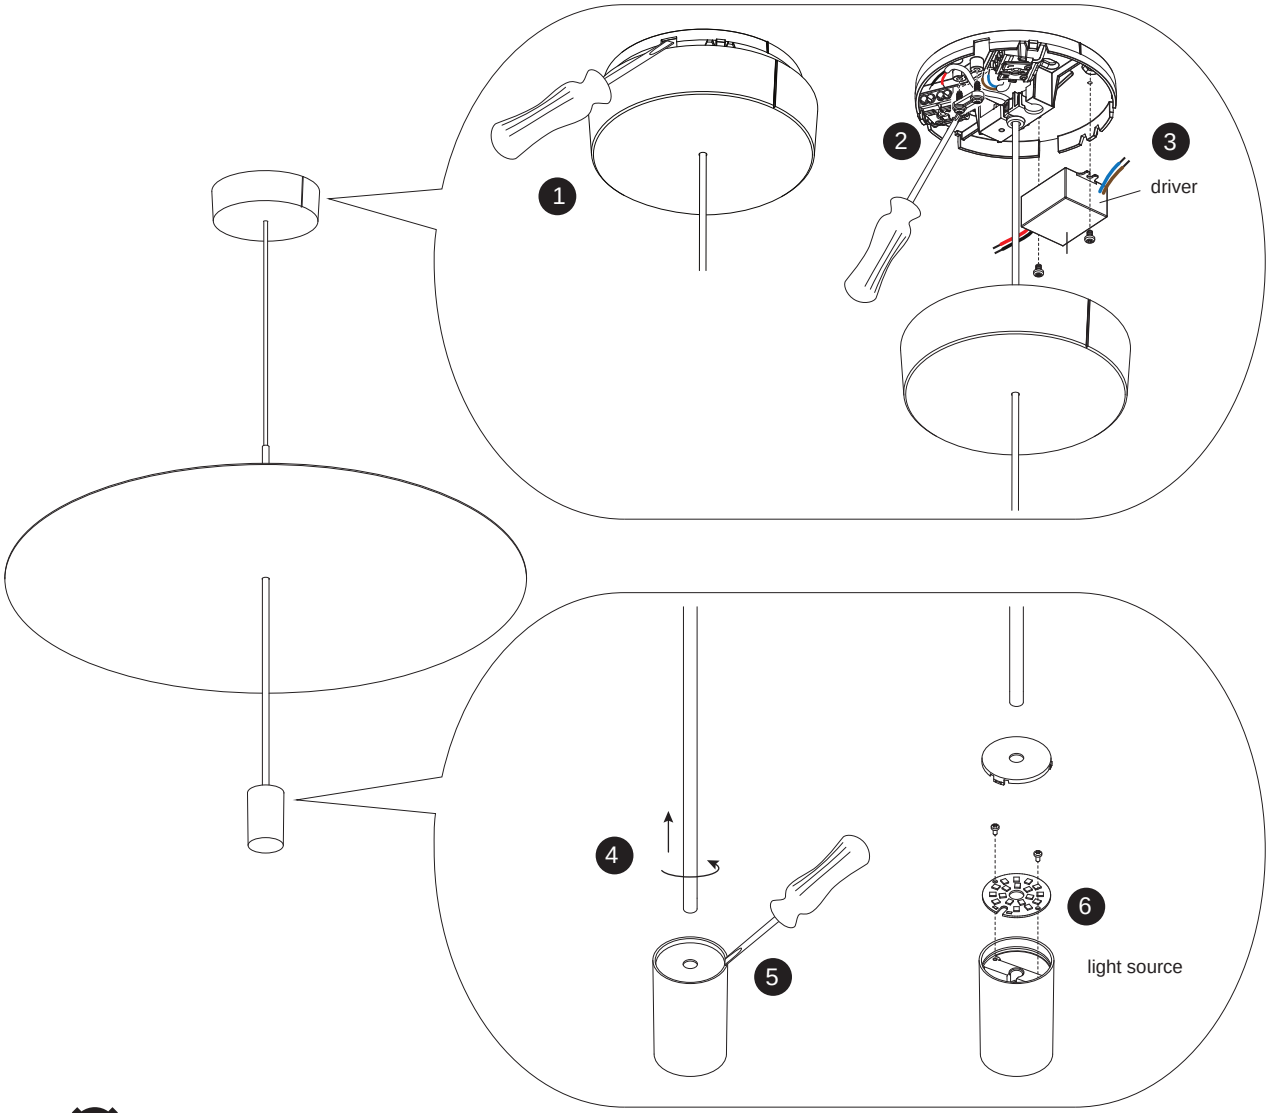

DISMOUNTING AND RECYCLING INSTRUCTIONS
Light source & driver

1. Remove the cover from the mounting base by placing a at tool into the gap and pushing it down.
2. Disconnect the wires from the connector and loosen the cable from the strain relief to dismount the xture.
3. Disconnect the wires from the driver and unscrew the driver to remove it.
4. Unscrew the pole from the lamp body.
5. Pull out the cover by using a at tool.
6. Unscrew the light source and disconnect the wires to remove the light source.

The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.

The driver can be replaced by the end user.

This luminaire contains a light source with the energy class E.

Use green electricity to light up your luminaire.

WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV
Spinnerijs traat 99 / 21,8500 K ortrijk, Belgium
weverducr e.com