



KOI 65

Light Source: 25W - 100~240Vac/24 Vdc - 2500 Lumen - 2700 Kelvin - CRI >90, Integrated LED or 3000 Kelvin
Dimmable: Triac Trailing Edge
Materials: Lentiflex®, Copper, Methacrylate, Aluminium
Weight: net 1,4 Kg - gross 2 Kg
Packaging: 80 x 16 x h. 16 cm

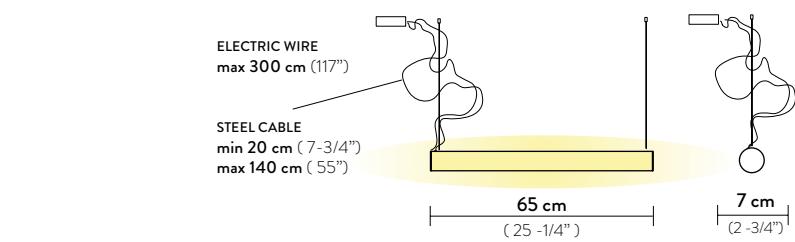


KOI 100

Light Source: 38W - 100~240Vac/24 Vdc - 3840 Lumen - 2700 Kelvin - CRI >90, Integrated LED or 3000 Kelvin
Dimmable: Triac Trailing Edge
Materials: Lentiflex®, Copper, Methacrylate, Aluminium
Weight: net 2 Kg - gross 2,6 Kg
Packaging: 115 x 16 x h. 16 cm

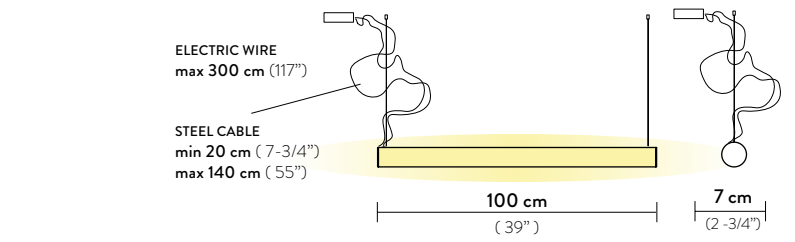


KOI 130

Light Source: 50W - 170~240Vac/24 Vdc - 5000 Lumen - 2700 Kelvin - CRI >90, Integrated LED or 3000 Kelvin
Dimmable: Triac Trailing Edge
Materials: Lentiflex®, Copper, Methacrylate, Aluminium
With: Magnetic Connection System
Weight: net 2,8 Kg - gross 3,4 Kg
Packaging: 80 x 16 x h. 16 cm

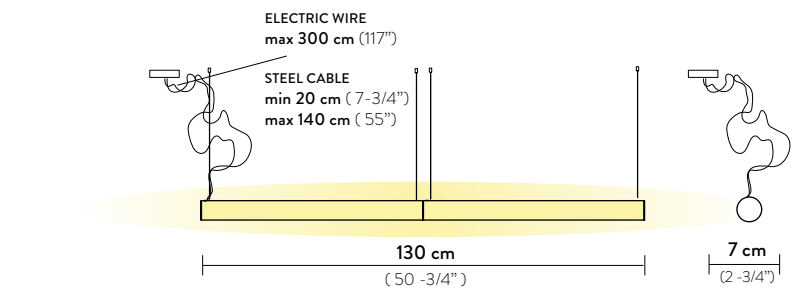

KOI 200

Light Source: 76W - 170~240Vac/24 Vdc - 7680 Lumen - 2700 Kelvin - CRI >90, Integrated LED or 3000 Kelvin
Dimmable: Triac Trailing Edge
Materials: Lentiflex®, Copper, Methacrylate, Aluminium
With: Magnetic Connection System
Weight: net 3,6 Kg - gross 4,4 Kg
Packaging: 115 x 16 x h. 16 cm

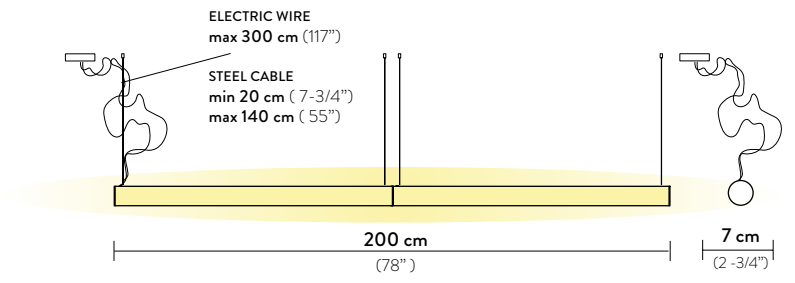

FINISH	SIZE	PRODUCT CODE		CANOPY DETAILS
 RED	65	KOISM00PRR01R0027KEU	2700K	<div>100-65: Ø 12 x h. 3,2 cm</div>  <div>130-200: Ø 14 x h. 4,5 cm</div> 
	65	KOISM00PRR01R0030KEU	3000K	
	100	KOISL00PRR01R0027KEU	2700K	
	100	KOISL00PRR01R0030KEU	3000K	
	130	KOISM00PRR01RDB27KEU	2700K	
	130	KOISM00PRR01RDB30KEU	3000K	
	200	KOISL00PRR01RDB27KEU	2700K	
	200	KOISL00PRR01RDB30KEU	3000K	
	ACCESSORIES			
	6M CABLE KIT (must be ordered with lamp)			
DALI				
CASAMBI				
 WHITE	65	KOISM00PRW01S0027KEU	2700K	<div>100-65: Ø 12 x h. 3,2 cm</div>  <div>130-200: Ø 14 x h. 4,5 cm</div> 
	65	KOISM00PRW01S0030KEU	3000K	
	100	KOISL00PRW01S0027KEU	2700K	
	100	KOISL00PRW01S0030KEU	3000K	
	130	KOISM00PRW01SDB27KEU	2700K	
	130	KOISM00PRW01SDB30KEU	3000K	
	200	KOISL00PRW01SDB27KEU	2700K	
	200	KOISL00PRW01SDB30KEU	3000K	
	ACCESSORIES			
	6M CABLE KIT (must be ordered with lamp)			
DALI				
CASAMBI				
 ANTHRACITE	65	KOISM00PRB01B0027KEU	2700K	<div>100-65: Ø 12 x h. 3,2 cm</div>  <div>130-200: Ø 14 x h. 4,5 cm</div> 
	65	KOISM00PRB01B0030KEU	3000K	
	100	KOISL00PRB01B0027KEU	2700K	
	100	KOISL00PRB01B0030KEU	3000K	
	130	KOISM00PRB01BDB27KEU	2700K	
	130	KOISM00PRB01BDB30KEU	3000K	
	200	KOISL00PRB01BDB27KEU	2700K	
	200	KOISL00PRB01BDB30KEU	3000K	
	ACCESSORIES			
	6M CABLE KIT (must be ordered with lamp)			
DALI				
CASAMBI				
 GOLD	65	KOISM00PRG01G0027KEU	2700K	<div>100-65: Ø 12 x h. 3,2 cm</div>  <div>130-200: Ø 14 x h. 4,5 cm</div> 
	65	KOISM00PRG01G0030KEU	3000K	
	100	KOISL00PRG01G0027KEU	2700K	
	100	KOISL00PRG01G0030KEU	3000K	
	130	KOISM00PRG01GDB27KEU	2700K	
	130	KOISM00PRG01GDB30KEU	3000K	
	200	KOISL00PRG01GDB27KEU	2700K	
	200	KOISL00PRG01GDB30KEU	3000K	
	ACCESSORIES			
	6M CABLE KIT (must be ordered with lamp)			
DALI				
CASAMBI				



ELECTRICAL INFORMATION

The information in this catalogue refers to electrical **STANDARDS WITH A VOLTAGE OF 220V**.
The electrical installation components and other accessories may vary depending on the regulations of different countries; please contact us for more information.

BULBS WATTAGE

The wattage of the light bulbs is suggested for an optimal balance between luminous output and product aesthetics and should not be considered as the maximum power that can be installed on the product. Where explicitly recommended, please follow the indicated bulb size and diameter.

DIMMING SYSTEM

Lamps marked as dimmable are intended to be so only if the electrical system has been prepared for such light variation.
Ensure before ordering that the product’s standard or accessory dimming system is compatible with this setting.
This is different for floor lamps and battery-powered lamps marked as dimmable, as their dimmer is integrated.

HANDMADE PROCESS

Slight differences of colour/size are due to the handmade processes involved, every piece is unique.
Slamp reserves the right to modify products without notice in the event of commercial conditions rendering this necessary.

PRODUCTS CERTIFICATIONS

Slamp products comply with international electrical standards. For country-specific certifications, please contact us for more information.



SLAMP

ETHICAL AND ENVIRONMENTAL CERTIFICATIONS

At Slamp, creativity and responsibility guide a design approach focused on sustainability and people. Our commitment is recognised through certifications that attest to high standards of equity, environmental management and responsible innovation

UNI/PDR 125:2022 – GENDER EQUALITY
Slamp promotes a fair and inclusive workplace, ensuring equal opportunities and valuing merit.

ISO 14001 – ENVIRONMENTAL MANAGEMENT
This certification confirms our commitment to reducing environmental impact through responsible resource management.



GENERAL SALES CONDITIONS

For the general terms and conditions of sale visit
<https://www.slamp.com/en/general-sales-conditions>

