
Occhio


Sito verticale VOLT datasheet

LED wall spotlight for exterior with spherical head and double-sided light output (up / down vertical). The lighting effect can be decided upon purchase.

The wall spotlight complies with protection class IP65 and is thus dust-tight and jet-proof. Version for surface mounting, connection to 230 V (AC) mains voltage (VOLT light engine), dimmable via trailing-edge phase-cut dimmer*.

Other versions: Sito giro, Sito lato (ceiling luminaire), Sito giù, Sito lato (wall luminaire), Sito basso (floor luminaire), Sito palo (bollard)

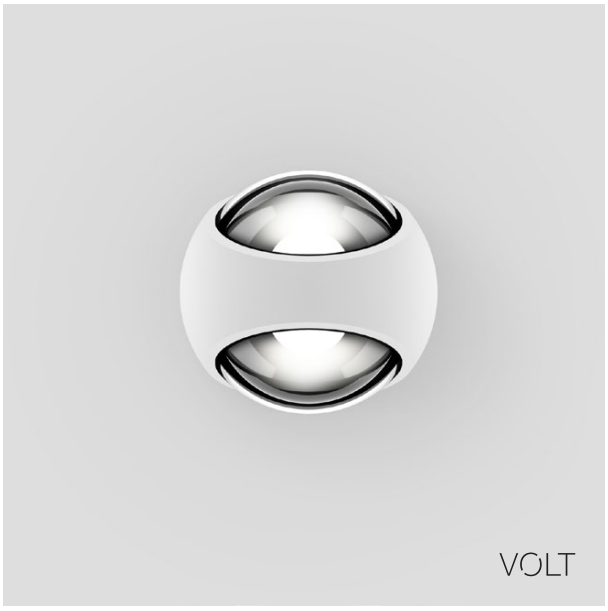

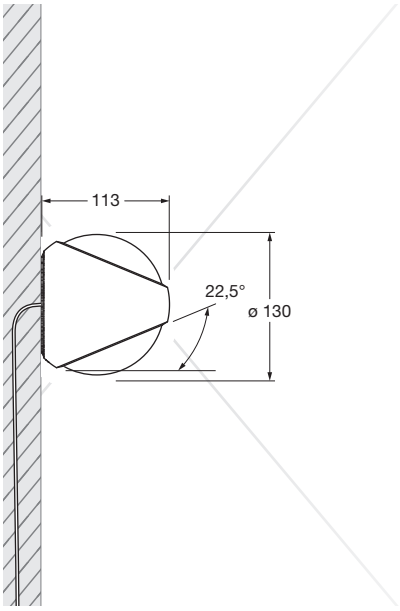

dimensions in mm


technical data Sito verticale VOLT


properties	material	aluminium, painted, optical glass
	weight	1.3 kg
surface	head	matt white, glossy white, matt black
VOLT light engine	average life time	> 40.000 hrs
	energy efficiency class	A
	power	2 × 9 W
	color rendering index	perfect color; CRI Ra 97
	color temperature	2700 K, 3000 K
	recommended use	exterior and damp room
electricity	dimming	by trailing-edge phasecut dimmer *
	connection	230 V AC / 50 Hz
	permitted operating conditions	– 20°C to + 40°C

*** For a list of compatible dimmers, see www.occhio.de/dim_en**

Occhio

Sito verticale VOLT
lighting effects

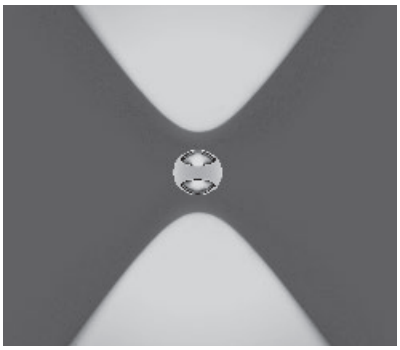




C80 contour
scattered light with contour beam angle (approx. 80°)

inserts: spherical glass
small lens medium

luminous flux: perfect color 2 × 9 W 1100 lm





S 80 soft
scattered light with soft contour beam angle (approx. 80°)


inserts: spherical glass
small lens medium
soft edge glass

luminous flux: perfect color 2 × 9 W 980 lm


Occhio

Sito verticale VOLT
connect several luminaires

through-wired with buried exterior junction box

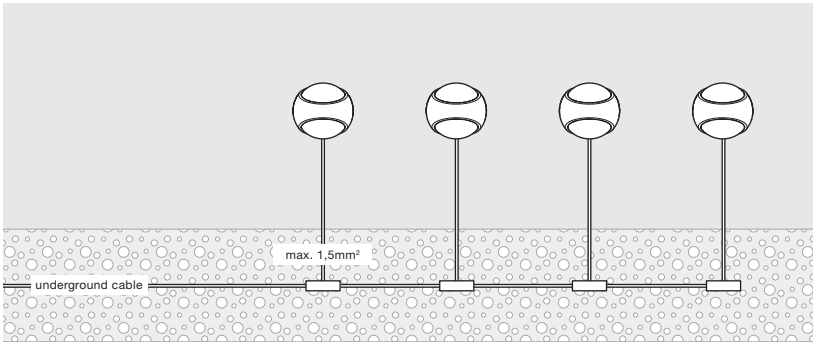

through-wired with plug in terminals

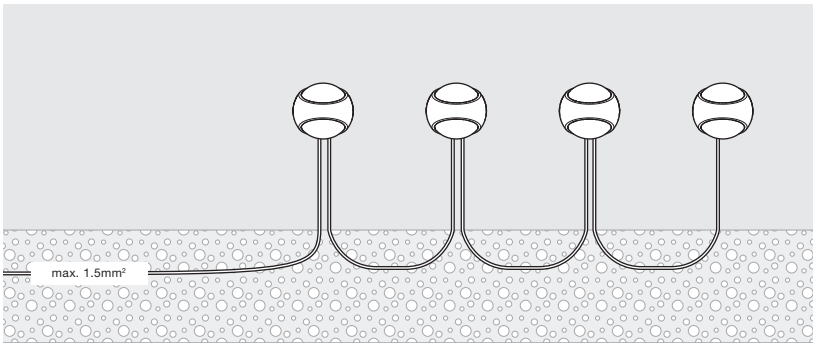

Occhio air module in switch box or distribution box

air

max. 4 luminaires

