

GENERAL

Wall  
Surface  
Jet Black + Gold  
IP20  
Interior  
700 lm  
9005<sup>a</sup>

LED

2700 K  
3-step binning

OPTICAL

Opal

PHYSICAL

Diameter 9 mm  
Height 1049 mm  
0.18 kg

ELECTRICAL

incl. PS | phase-cut dim  
220 - 240 V  
Total connected power 12 W  
LED Inset 12 W  
PC2  
Safety distance 0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.


Project

Type

Notes

Quantity

Date

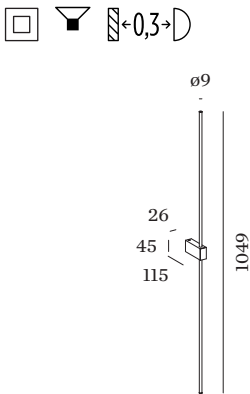



WEVER & DUCRÉ  
LIGHTING

# FINLIN 2.0

370284K3

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.96   | 0.93   | 0.89   | 0.86   | 0.83   |
| LSF                | 1      | 1      | 1      | 1      | 1      |

|                  |  |                   |                                 |
|------------------|--|-------------------|---------------------------------|
| MF               | $LMF \times RSMF \times LLMF \times LSF$ | RSMF <sup>a</sup> | Room Surface Maintenance Factor |
| MF               | Maintenance Factor                       | LLMF              | Lamp Lumens Maintenance Factor  |
| LMF <sup>a</sup> | Luminaire Maintenance Factor             | LSF               | Lamp Survival Faktor            |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.