



WEVER & DUCRÉ
LIGHTING

VENN 1.0

149184W2

GENERAL

Wall
Surface
Signal White
IP20
Interior
3030 lm
9010^a

LED

2700 K
CRI 80
L80 / 50000 h
Initial 3 MacAdam

OPTICAL

UGR < 10
65° < 1500 cd/m²

PHYSICAL



Length 724 mm
Width 724 mm
Height 90 mm
2.5 kg

ELECTRICAL


phase-cut DIM
220 - 240 V
Total connected power 39 W
78 lm/W
PC1 220-240V

^a RAL Palette colors may deviate slightly due to production conditions.

Project
Type
Notes
Quantity
Date

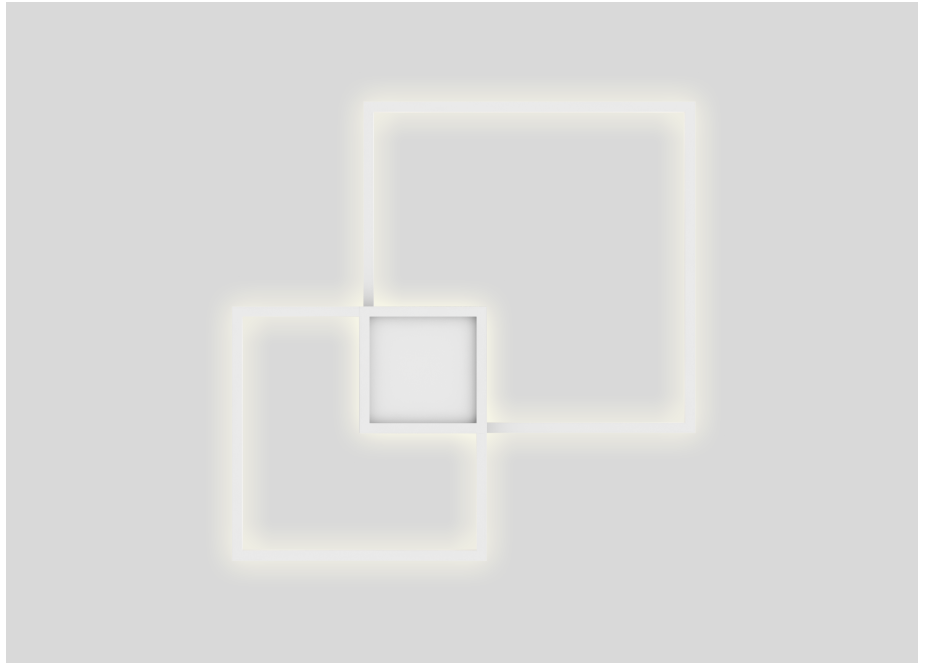

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

VENN 1.0

149184W2

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.89 |
| LSF | 1 | 1 | 1 | 1 | 1 |

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.