

Image shown above 14.1 with round canopy

± Ø100mm

<b>Series</b>	14
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Clear, grey, amber
<b>Lamp</b>	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 14.1 - 14.9 Non-adjustable length: 14.11 - 14.50
<b>Canopy Finishes</b>	14.1 - 14.7: white, black or brushed nickel canopy 14.1mi/mo: white polyurethane canopy 14.9 - 14.50: white canopy
<b>Materials</b>	Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 14.1m/mo/mi  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible.  Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Registration</b>	© 14 Series product design protected as U.S. Reg. No. 7,129,209

**Certifications**



**Weight (kg)**



Round

14.1	2
14.3	5.5
14.5	9.5
14.7	14
14.11	30
14.14	37
14.20	51
14.26	61.5
14.36	83.5



Square


14.11	30
14.16	40.5
14.26	63.5
14.36	105
14.50	109.6




Rectangle

14.9	25.9
14.11	30
14.14	36.5
14.16	41.4
14.20	63
14.26	74
14.36	83.5

ADJUSTABLE LENGTH

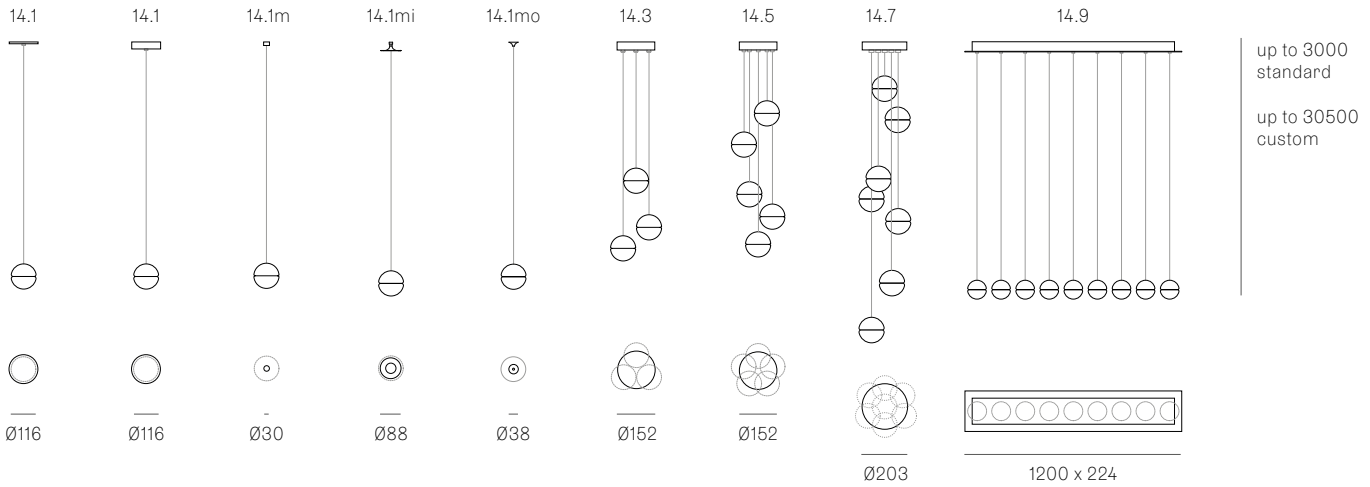

NON-ADJUSTABLE LENGTH

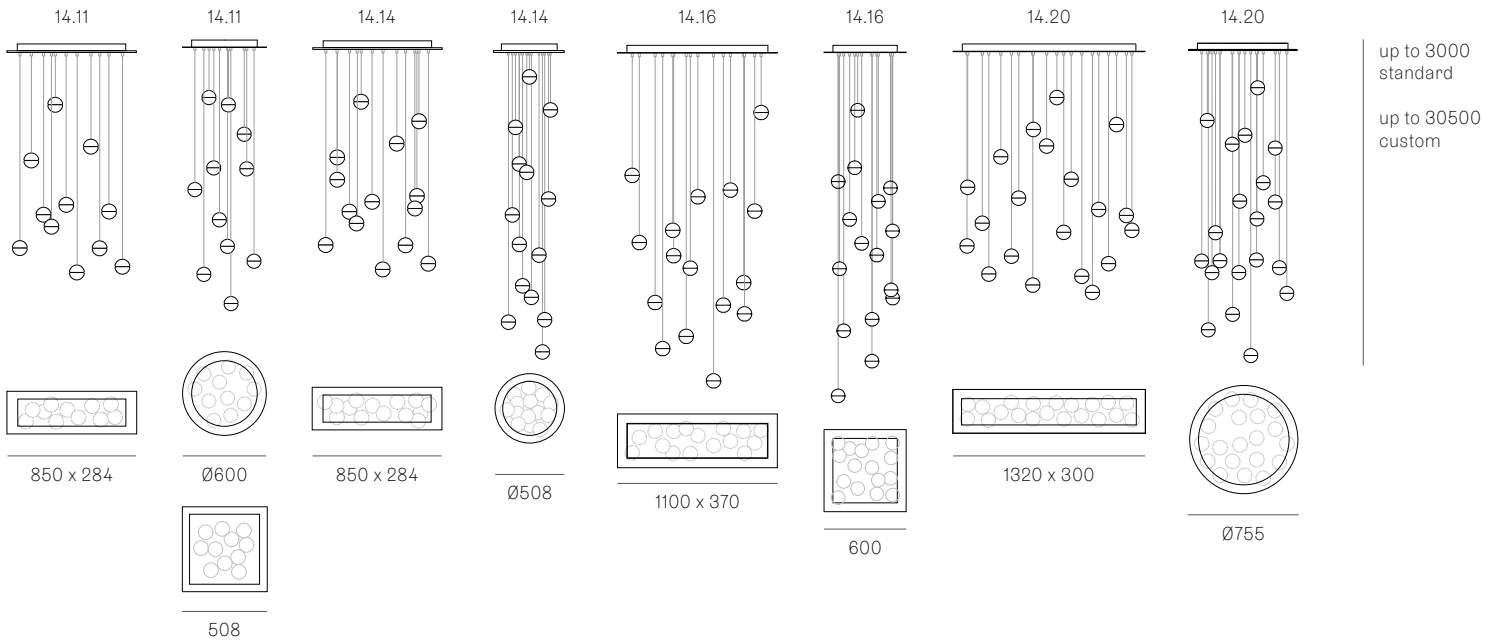


All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

NON-ADJUSTABLE LENGTH

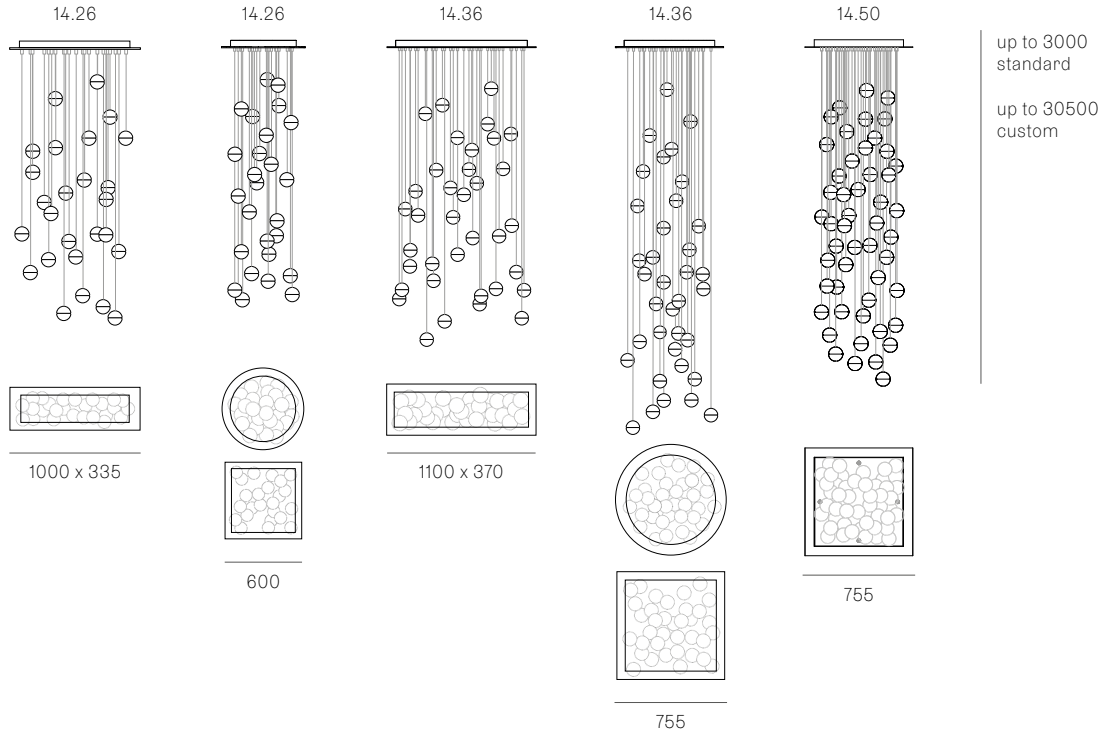

All dimensions are in millimeters (mm) unless otherwise specified.