

Dark

ARKOSLIGHT



DIMENSIONS





ACCESSORIES



DRIVER OPTIONS



CONNECTOR IP67

	PRODUCT
Name	DARK 19º 2700K N
Reference	A2740010N
Color	Black
RAL	9005
Category	OUTDOOR
	LIGHT SOURCE
Type	LED
Gross luminous flux	100 / 180 / 250 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	1 / 2,1 / 3,2 W
Current	350 / 700 / 1050 mA
Efficacy	100 / 86 / 78 lm/W
LED lifespan	L90B10 >102.000h
	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	80%
Light beam angle	19°
	LIGHTING FIXTURE | ELECTRICAL DATA
Driver	Excluded: Must be placed on remote
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	
	OTHER DATA
Sealing	IP67
Wireless control	Please Consult
Impact resistance	IK08
Recess measurements	Ø52 mm
Outdoor Use	Yes
Maximum surface temperature	40°
Supported load	5000
Weight	235 g
Packaged weight	266,4 g
Packaging dimensions	82 x 74 x 91 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent


CE

Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). *** NOTE: Recessed box included

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

11-01-25 / 13:30

5 Year GUARANTEE*



DRIVER OPTIONS*		P	I	
	0434-00-39	1W	350mA	1 to 12 Darks
	0434-00-40	2,1W	700mA	1 to 12 Darks
	0434-00-41	3,2W	1050mA	1 to 11 Darks


220
240 V~

NO DIM | **IP**20

*DIM Drivers please consult

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year GUARANTEE*

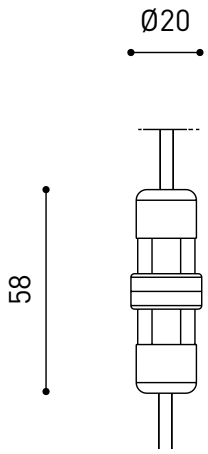


	PRODUCT (OPTIONAL ACCESSORY)
Model	Connector IP67
Reference	0434-01- 66 | **N** ■ |
Category	Accessories

For cable Ø 4,5 - 6,5mm, section ≤ 1,5mm^2

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

ECODESIGN AND ENERGY LABELLING

ARKOSLIGHT®



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé


Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann


INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen




Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year GUARANTEE