
Super O _Wall lamp



Rechargeable battery sconce. The LED module is attached to the lamp frame with a magnet. It can rotate 360°, allowing you to aim the light flow. A touch control on the top of the module allows you to switch the light on, adjust its intensity (with 4-step dimming) and select its color temperature. And thanks to its high IP rating, the lamps in the collection can also be used outdoors. An electronic control system monitors the remaining battery power and guarantees a constant luminous flux until the battery runs out, ensuring that recharging is optimized and always performed correctly. The module can be removed and recharged easily by connecting it to the contact charging disc. Battery charger not included.

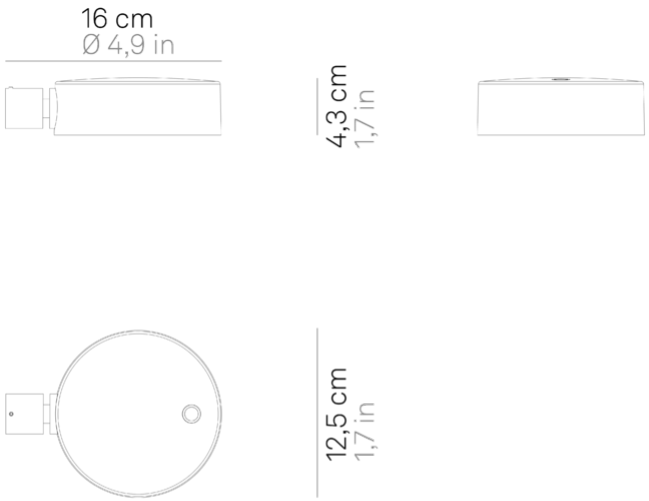

LED | dimmable | IP65

LD1150

White	**B3**	Black	**N3**

DESIGN IN ITALY BY ZAFFERANO SRL,MADE IN PRC
Zafferano SRL - Viale dell'Industria, 26 31055 Quinto di Treviso - Italy www.zafferanoitalia.com

The company reserves the right to modify product specifications.
For more information visit www.zafferanoitalia.com

zafferano
LAMPES-À-PORTER


Super O _Wall lamp

Lighting specifications	
source	LED
type	SMD
total power	3.5 W
power LED	3.0 W
color temperature	2700 - 3150 - 4000 K
lumen lamp	226 - 262 - 261 lm
lumen LED	287 - 331 - 336 lm
beam angle	94°
CRI	> 90
class	F
dimmer	TOUCH DIMMER
motion sensor	NO

Electrical specifications	
classe	3
supply voltage	5Vdc max.2A
battery	2 cell li-ion battery pack mod. 18650 3,7v - 2500 ma/h
battery life	100% 11 h. - 60% 18 h. - 30% 36 h. - 6% 160 h.
charging time	5 H.

ACCESSORIES

LD0300UC



4.4 cm •4.4 cm •3.6 cm •IP20
• 100-240V• 50/60 Hz

Black

LD0340RA



6 cm •13.5 cm •4.5 cm •3.5 W
•IP20 • 100-240V• 50/60 Hz



Black

LD1060

Ø 12.5 cm •4.3 cm •3.5 W
•287 - 331 - 336 lm
•2700 - 3150 - 4000 K •IP65
•CRI>90 • 5Vdc max.2A• 50/60 Hz



White B3

Black N3